



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No : AK007628-001


Date: 2008-03-14

Application No : LK206932

Applicant : CHEUNG KEE CANVAS LTD.
G/F., 352 RECLAMATION STREET,
KOWLOON, HONG KONG

Sample Description : One (1) submitted piece of sample in green colour stated to be 'PVC Tarpanlin 0.30mm C-7061' with Article No.: CK2003. ***

Sample Photo :

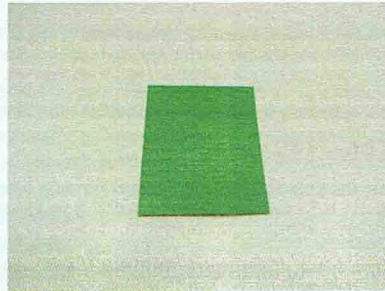

Date Received : 2008-03-06.

Test Period : 2008-03-06 to 2008-03-14.

Test Requested : Flammability test stated in the UK Furniture and Furnishings (Fire) (Safety) Regulations 1988, Schedule 5 Part 1.


Test Method : As stated in the above specifications, the test was determined in accordance with BS 5852 : Part 1 : 1979 (Butane Flame Ignition Source 1).

Test Result : Refer to the results on page 2.

Conclusion : The submitted sample was found to comply with the requirements of the UK Furniture and Furnishings (Fire) (Safety) Regulations 1988 with amendments in 1989 and 1993 of United Kingdom, Schedule 5 Part 1.

For and on behalf of
CMA Industrial Development Foundation Limited

Authorized Signature :

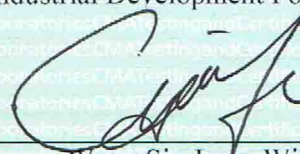
Wong Siu-Lam, Wilson
Manager – Material & Packaging

Page 1 of 2

This document shall not be reproduced except in full or with written approval by the laboratory.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com



TEST REPORT

Report No : AK007628-001

Date: 2008-03-14

Application No : LK206932

Test Result :

Flammability test stated in the UK Furniture and Furnishings (Fire) (Safety) Regulations 1988 with amendments in 1989 and 1993 of United Kingdom, Schedule 5 Part 1 (Ignition Source : 1).

Condition of test specimen : Temperature 20 ± 5°C Relative Humidity 50 ± 20%

Test Condition : Temperature 22°C Relative Humidity 58%

Criteria of Ignition	Specimen	
	1	2
Progressive Smouldering criteria		
a. Evidence of progressive smouldering in the interior and/or cover after 120 seconds of the removal of burner tube;	No	No
b. On final examination progressive smouldering is observed on the assembly dismantle and examined it internally.	No	No
Flaming criteria		
a. Evidence of flaming in the interior and/or cover after 120 seconds of the removal of burner tube.	No	No
Result	Non-ignition	

Fabric	Time to extinction after removal of burner			
	Flaming ceased time		Smoking ceased time	
	Min	Sec	Min	Sec
1 st test	/	3	/	22
Retest	/	2	/	25

- Remark:
- 1) The above test results relate only to the ignitability of the submitted sample with specific material, construction and treatment under the particular conditions of test.
 - 2) The above test results relate only to the ignitability of the combination of materials under the particular conditions of test; they are not intended as a means of assessing the full potential fire hazard of the materials in use.
 - 3) The submitted sample was tested with standard non-fire retardant polyurethane foam as the filling material and subjected to water soaking procedure* before being conditioned.
* The specimen was immersed in water in accordance with clauses 4.2 to 4.5 of BS 5651: 1978, at 40 ± 1 °C for 30 minutes and followed by flat dry.
 - 4) °C denotes degree Celsius
% denotes percentage
s denotes seconds

***** End of Report *****