

军用充气帐篷



军用充气帐篷

该型帐篷采用气柱框架形式，气囊采用尼龙精编PVC双面涂层布高频热和成型，电动泵充气即可快速成型。具有结构简洁、抗拉强度高、刚性大、稳定性好、抗风、抗紫外线、防雨、成型快等优点，抗风6~8级、适温范围-30℃~+65℃、静水压 $\geq 20\text{kPa}$ 、防地表水160~200mm、充气时间2~8分钟。



CJ-ZP 001




CJ-ZP 002

军用充气帐篷

基本参数

型号	尺寸 (mm)	重量 (kg)	面积 m ²	推荐使用人数
CJ-ZP 09	3200x2800x2200	40	9	5 人
CJ-ZP 10	3600x2800x2200	45	10	6 人
CJ-ZP 12	4100x3000x2200	48	12	8 人
CJ-ZP 15	5060x3000x2200	55	15	10 人
CJ-ZP 16	4500x3720x2400	62	16	10 人
CJ-ZP 20	5000x4200x2650	65	20	12 人
CJ-ZP 30	6442x4600x2760	108	30	15 人
CJ-ZP 40	8360x4800x2760	120	40	18 人
CJ-ZP 50	10000x5000x2670	140	50	20 人
CJ-ZP 100	10000x10000x3760	240	100	45 人

非标准产品，可按客户要求定制

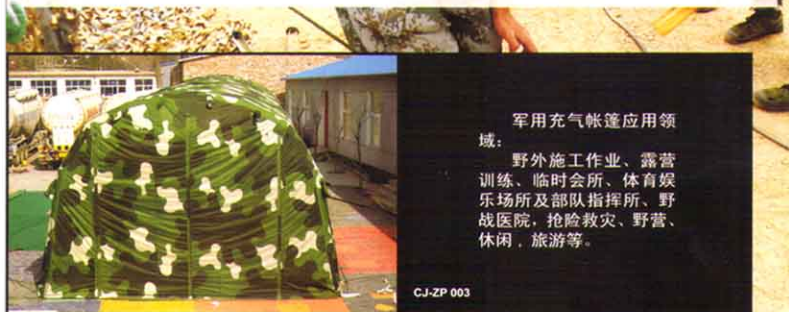

军用充气帐篷



CJ-ZP 006



CJ-ZP 007



CJ-ZP 008

军用充气帐篷



CJ-ZP 010



CJ-ZP 009

充气帐篷具有的优势：

其重量轻，体积小，在运输中具有普通金属支架帐篷所没有的优势，并且其架设与拆除都非常简单，不会浪费更多的人力与时间，尤其适合在紧急事件的快速反应时使用。在环境恶劣无法运送的时候，充气帐篷还可以空投。



CJ-ZP 011