


Model No. CK1500	PE Tarpaulin 通用ISO9001-2008國際認可 產品由中國平安保險責任承保
General Applications:	Construction, Marine (Field) covers, Storage covers and many other applications
Colors:	Silver/Green
Available Grades:	Ultra-Violet, Anti-Mildew
Type of Products:	Roll Type, Cut Size: 3Mx3M, 3Mx4.5M, 3Mx6M, 3Mx7M, 4Mx6M, 4Mx10M, 4.5Mx4.5M, 4.5Mx15M, 5Mx5M, 5Mx6M, 5Mx10M, 6Mx6M, 6Mx7M, 6Mx9M, 6Mx12M, 6Mx15M, 7Mx7M, 8Mx8M, 9Mx9M, 9Mx12M, 9Mx18M, 10Mx10M, 12Mx12M, 15Mx15M, 18Mx18M
PE 全新料生產之防老化產品，正常使用下，壽命可達三年。P E 繩加固四周，鋁扣打孔	



不變形
Dimensional
Stability



抗紫外線
UV
Resistant




色牢度
Color
Fastness

Physical Properties:



Fabric Detail 網布規格				
Item 項目名稱	Test Method 執行標準	Unit 單位	Value 數據	
Thickness 厚度	DIN53353	mm	0.31	
Total Weight 總重量	DIN53352	g/m ²	159.3	
Tensile Strength 拉伸強度	DIN53354	N/5cm	經 Warp	629.0
			緯 Weft	603.2
Elongation at Break 斷裂伸長率	DIN53354	%	經 Warp	19.6
			緯 Weft	22.6
Tear Strength 撕裂強度	DIN53363	N	經 Warp	139.3
			緯 Weft	112
Adhesion of Coating Strength 剝離負荷	DIN53357	N/5cm	經 Warp	
			緯 Weft	
Remarks 備註				

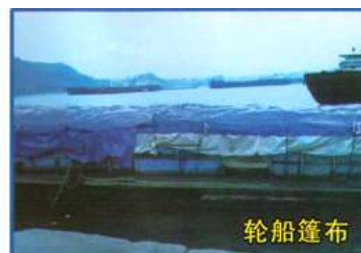

祥記帆布工程有限公司
Cheung Kee Canvas Ltd.

G/F., 352 Reclamation St., Kowloon, Hong Kong.
香港九龍新填地街 352 號地下
Tel: 2385 2644, 2780 7505 Fax: 2771 4599
url: <http://www.ckcanvasltd.com> email: contact@ckcanvasltd.com