



Model No. CK2009 NOISE BARRIER	High Tenacity Polyester PVC Laminated Fabrics
General Applications:	Construction, Marine (Field) covers, Storage covers and many other applications
Colors:	Yellow, Sky Blue, Green, Orange, Dark Green, White, Grey
Available Grades:	Fire-Retardant, Ultra-Violet, Anti-Mildew, Anti-Cold, Sound Insulated
Type of Products:	Roll Type
Flammability Test Method:	BS 476 PART 7:1997 Class2, BS5867-2 Type B
Sound Reduction Method:	ISO 10140-2-2010
Sizes:	2Mx3M, 2Mx6M

Frequency f (Hz)	Airborne Sound Pressure Level (dB)
100	5.0
125	4.3
160	10.8
200	9.7
250	10.1
315	10.3
400	10.0
500	11.3
630	12.5
800	13.9
1000	15.7
1250	17.4
1600	17.7
2000	19.2
2500	20.8
3150	22.9
4000	24.4
5000	26.3
Rw (C;Ctr)	16 (-1;-3)

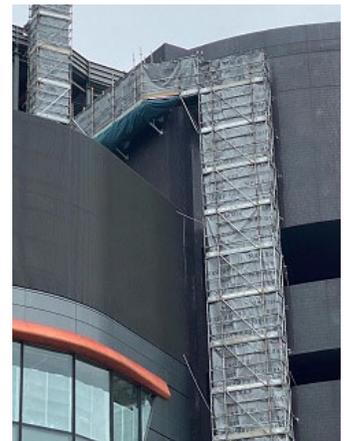

Fabric Detail 網布規格	1000D x 1000D x 20 x22			
Item 項目名稱	Test Method 執行標準	Unit 單位	Value 數據	
Thickness 厚度	DIN53353	mm	1.0	
Total Weight 總重量	DIN53352	g/m2	1132.2	
Tensile Strength 拉伸強度	DIN53354	N/5cm	經 Warp	3040
			緯 Weft	2549
Elongation at Break 斷裂伸長率	DIN53354	%	經 Warp	17.3
			緯 Weft	23.3
Tear Strength 撕裂強度	DIN53363	N	經 Warp	448
			緯 Weft	374
Adhesion of Coating Strength 剝離負荷	DIN53357	N/5cm	經 Warp	123
			緯 Weft	108
Remarks 備註				

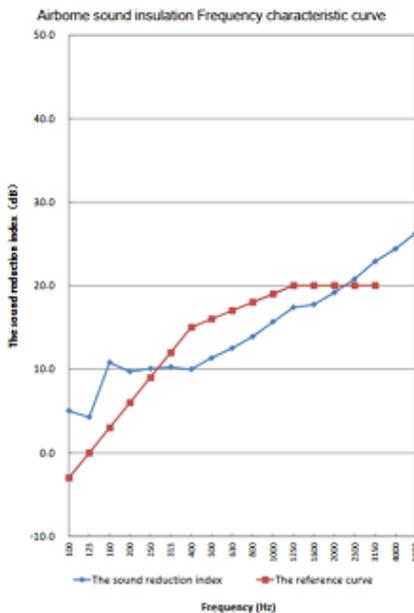

This technical data is offered as helpful suggestion only. It's accurate to the best of our knowledge at time of printing.

祥記帆布工程有限公司
Cheung Kee Canvas Ltd.

G/F., 352 Reclamation St., Kowloon, Hong Kong.
香港九龍新填地街 352 號地下
Tel: 2385 2644, 2780 7505 Fax: 2771 4599
url: <https://www.ckcanvasltd.com> email: contact@ckcanvasltd.com